


PROTECTGLOBAL.COM

# INSTRUCTIONS FOR INSTALLING 1000 ML FLUID BAG KIT

PROTECT 600/600i/1100/1100i/2200/2200i




SECURED IN SECONDS

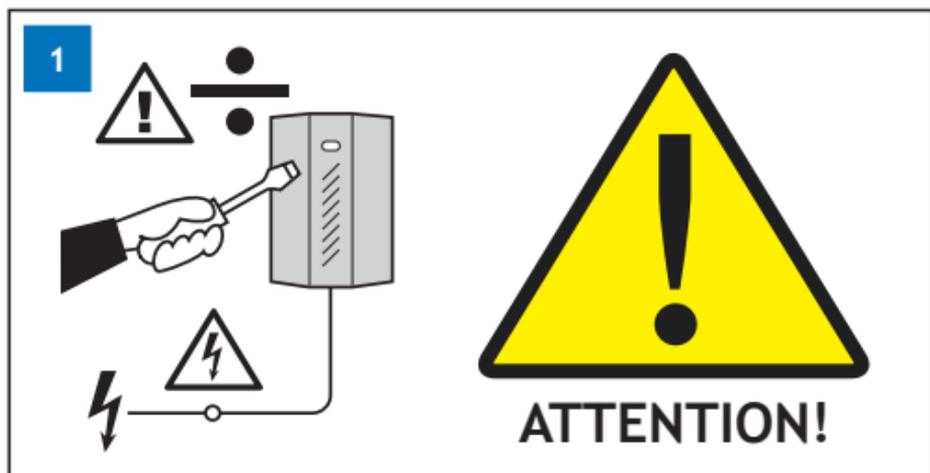


**IMPORTANT:  
DO NOT TOUCH!**


Turn off the power supply to the fog cannon! Allow the unit to cool down for at least one hour.

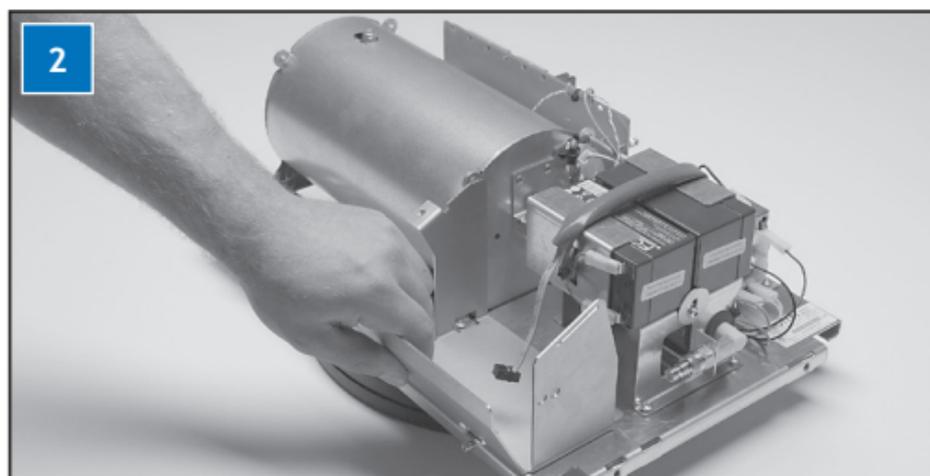

Place the supplied metal plate as shown in the diagram and push it a little to the left until it clicks into place. Attach the metal plate to the base plate with a screw (T20).

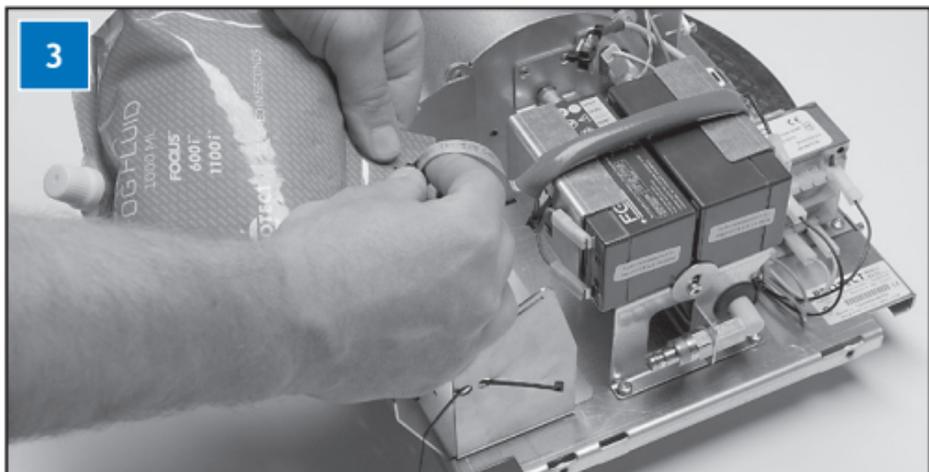
**3**

Connect the fluid bag to the cord and place it in the holder. Now thread the heat resistant strip through the two holes in the metal plate (but do not tighten the hose with the strip just yet).

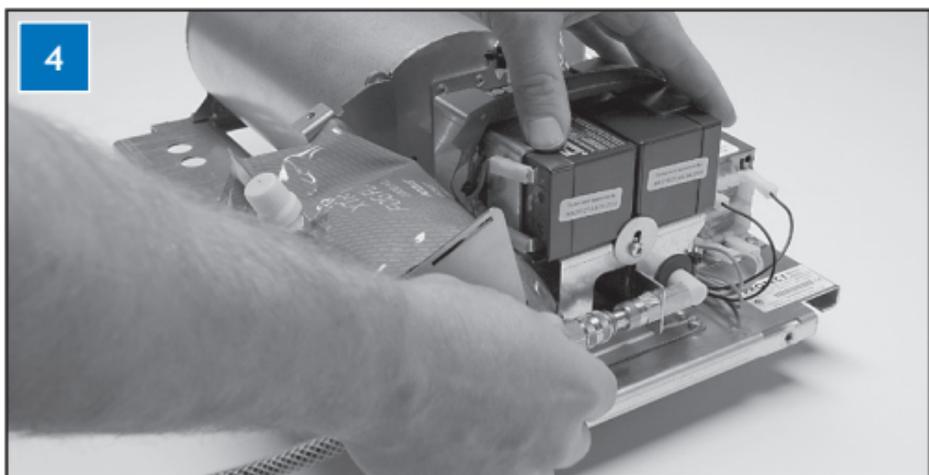**4**


Connect the fluid hose to the unit. When you hear a “click” it is properly in place.

5

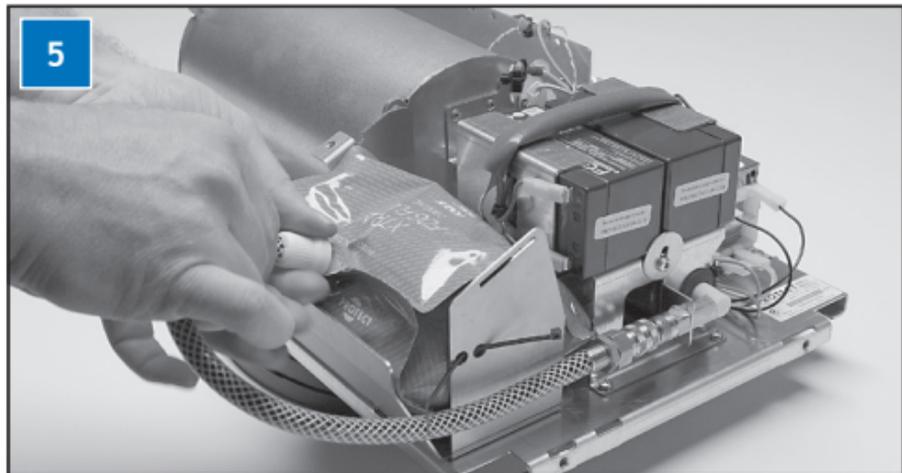


Unscrew the cap on the bag and connect/screw the fluid bag's plastic adapter to the bag. **IMPORTANT:** Do not screw too tight or too loose!

6

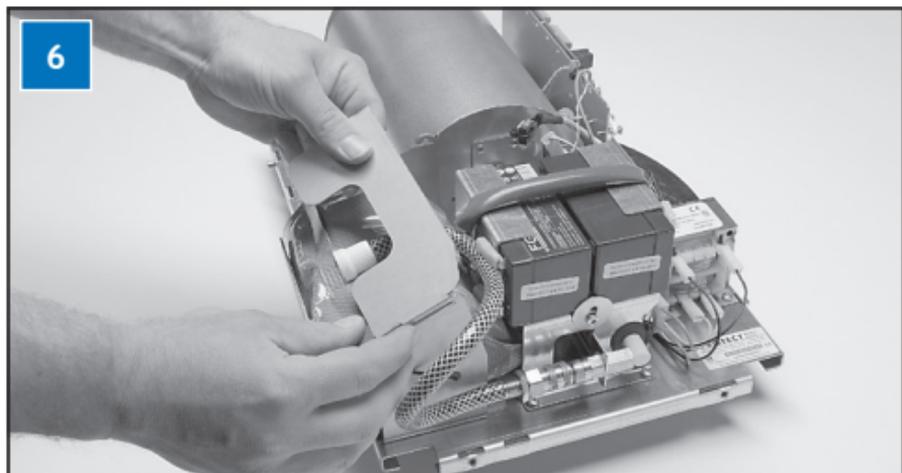

Place the top cover in the corner to the right and screw it on the opposite side with the supplied screw. **IMPORTANT:** The top cover must not trap the fluid bag's cap and ensure the hose is placed between the two poles on the battery.

7

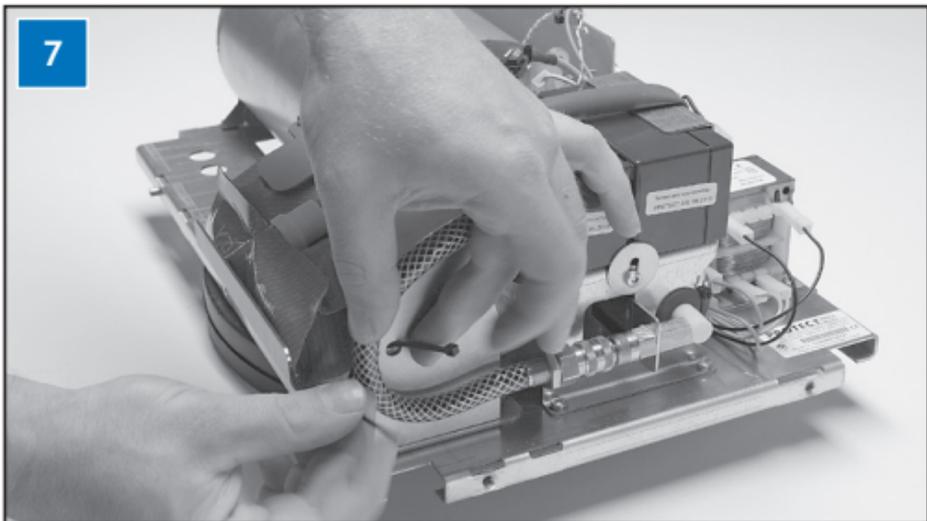

Now the strip can finally be tightened around the fluid hose. **IMPORTANT:** Do not tighten too tight or too loose!

8



Scan the QR code and watch a video of how to mount 1000 ML kit and liquid bag.

## **IMPORTANT INFORMATION ABOUT THE WARRANTY**

If this manual is not completely followed, PROTECT A/S cannot be held responsible for any errors caused by the modification of the fog cannon. In addition, the fog cannon's warranty will be annulled.

# **INFO**

Visit [PROTECTGLOBAL.COM](http://PROTECTGLOBAL.COM) for more information about security fog and PROTECT A/S.

### **PROTECT A/S**

Hasselager Centervej 5 · DK-8260 Viby J · Tel.: (+45) 86 72 18 81  
[info@protectglobal.com](mailto:info@protectglobal.com) · [protectglobal.com](http://protectglobal.com)