

PROTECTGLOBAL.COM



*Scan the code with a smartphone
to watch how to replace the fluid bag.*

Version 8, February 2019

REPLACEMENT OF THE QUMULUS[®] FLUID BAG



SECURED IN SECONDS


PROTECT A/S

Hasselager Centervej 5 · DK-8260 Viby J · Tel.: (+45) 86 72 18 81
info@protectglobal.com · www.protectglobal.com


Item no.: 21703_000323DK



SECURED IN SECONDS

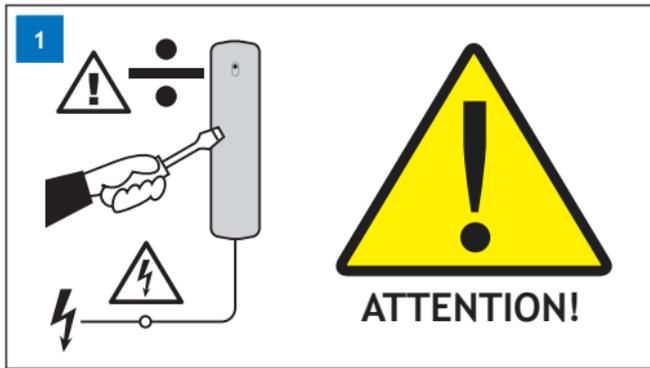

IMPORTANT: Turn off power supply of the QUMULUS®!
DON'T TOUCH! Cool down for at least one hour.

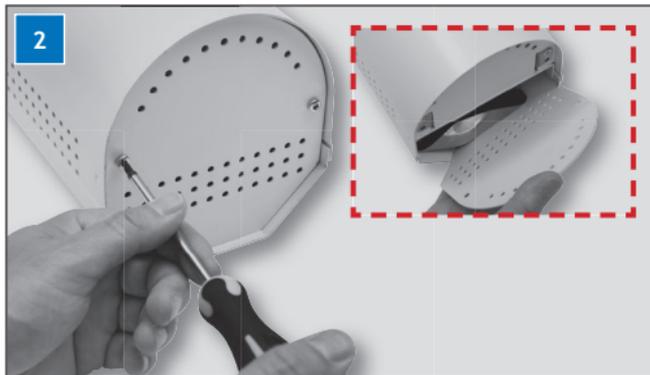

Remove the two screws and remove the metal plate in the bottom of the Fog Cannon™. Remove the empty fluid bag.



Remove the fluid hose from the empty bag by pressing the metal part at the end of the hose. Also, remove the cord by pressing the bottom of the plug, and then carefully pull it out.



Connect the fluid hose and cord to the new bag and push it up into the machine. The hose coupling must click and the little metal part jump out. The metal plate is screwed back on.